

HCT Low Profile Trolley Operator

High Cycle Door/Gate Operator



I.C./F.C.C. Certified

Customer _____


Project _____

Architect/Engineer _____

Contractor _____

Drawing Number _____ Date _____ Sheet _____ of _____

SHOP DRAWING

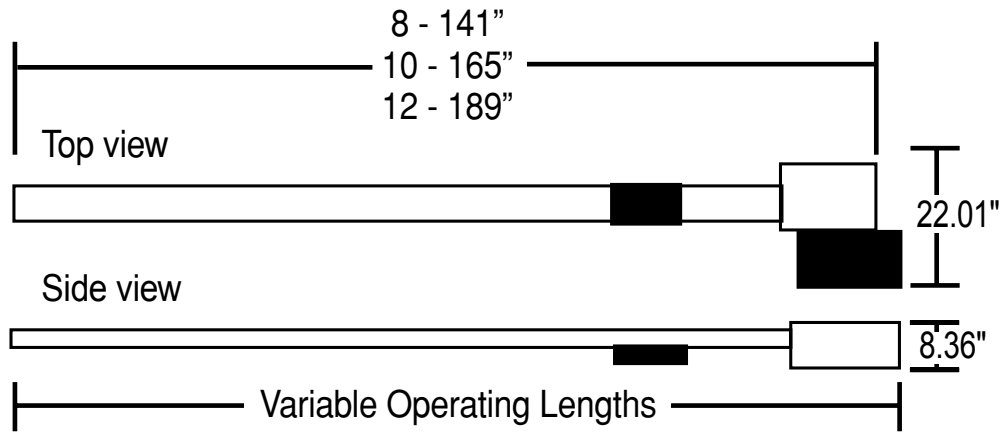

Specifications for Ordering

1) Supply _____ () LiftMaster Operator(s) Model _____
 _____ HP, _____ Volts, _____ Phase, _____ Hertz _____

2) For _____ wide x _____ high door(s) with _____

3) Supply _____ () OPEN/CLOSE/STOP control station(s) in NEMA _____ enclosure per operator

4) Supply auxiliary and optional equipment as specified below (one per operator unless otherwise noted)

Additional Info

Notes:

- 1) Refer to Model HCT product data sheet for general information
- 2) Refer to drawing _____ for wiring diagram

Manufactured by:
 The Chamberlain Group, Inc.
 845 Larch Avenue • Elmhurst, Illinois 60126

For More Information:

call (800) 323-2276

visit www.liftmaster.com or

<http://specs.chamberlain.com/architectscorner>

©2008 The Chamberlain Group, Inc.

Printed in U.S.A.

| OPERATOR AMP RATING (Full Load) | | |
|---------------------------------|--------|-----|
| HP | | |
| VOLTAGE - PHASE 60 HZ | 1/2 | 4.1 |
| | 115-1Ø | 4.1 |

CHAMBERLAIN®

LiftMaster®

ELITE SERIES™ LOGIC 3.0